

NsAFE


ENGINEERING INC.

FREEWALK® GUARD RAILING



FEATURES

- Engineered Fall Prevention for use on flat roofs
- Complies with CSA 259.18-19 Standard
- Meets and exceeds OSHA and OBC Regulations & Standards
- Entirely non – penetrating
- Modular design allows for quick and easy installation
- Soft rubber base maximizes slip resistance and prevents against all roof damage
- Comes standard with all railings and components Hot-Dipped Galvanized

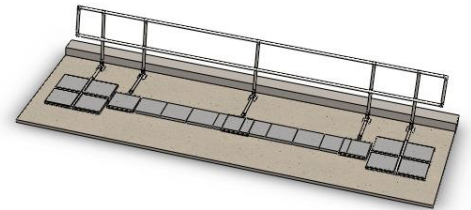

SPECIFICATIONS

- All Guard Railings are 42 in (110mm) high and include mid rail
- Optional Toe Board available
- Can be used on roofs with up to a 5° slope
- Available Roof Hatch and Ladder railing solutions
- Custom lengths and designs can be pro

NSAFE

ENGINEERING INC.

