

Nsafe


ENGINEERING INC.

FREEWALK® ST GUARD RAILING



FEATURES

- Meets and exceeds OSHA, Ontario Building Code and National Building Code Regulations & Standards
- Engineered Fall Prevention for use on flat roofs
- Entirely Non – penetrating of roof membranes
- Soft rubber base maximizes slip resistance and prevents against all roof damage
- Modular design allows for quick and easy installation
- Base comes with built in railing receptacles and Built in toe board receptacles
- Each portable Base comes standard with 2 ergonomic handles formed into Base
- Comes standard with all Guard railings and components Hot-dipped Galvanized
- Railings are secured to Base with stainless set screws, Positively locked, eliminating wobble of the railing

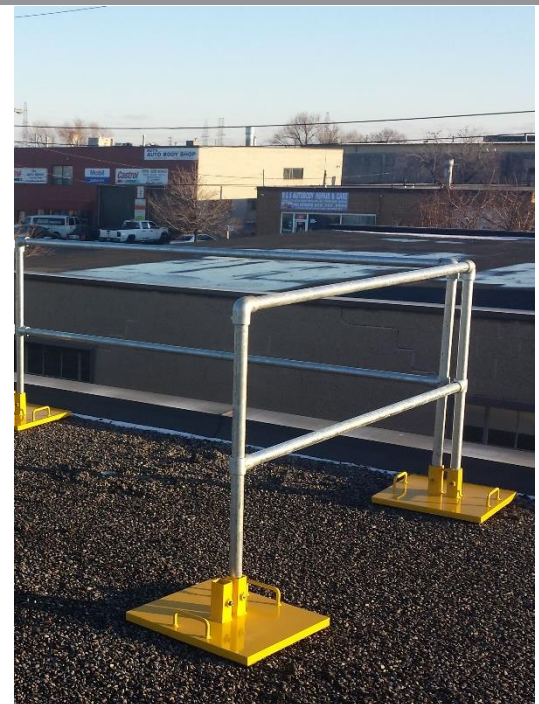


Made in Canada 

SPECIFICATIONS




- Guard Railings available in lengths of 3ft, 4ft, 6ft and 8ft (910, 1220, 1830 and 2440mm)
- Custom lengths are available upon request
- Railings come standard Hot Dipped Galvanized with option of powder coated finish of any colour
- All railings are 1 1/4" sch 40 pipe (DN 32)
- Feature 42in (1070mm) Top-rail with Mid-rail

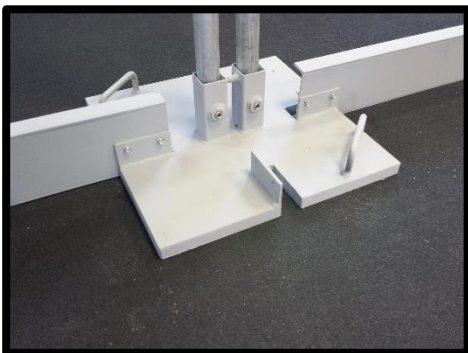

- Portable Guardrail Base features built-in guard railing receptacles and built in toe board receptacles
- Features two (2) carry handles integrated into the base
- Soft rubber base to prevent any damage of roof
- Stainless Steel fasteners to prevent against oxidation
- Optional 6in (150mm) steel toe board, available in lengths corresponding to guard rail lengths



- Optional Base Pad, made of a rubber compound to provide added protection to the roof surface
- Allows water drainage to prevent any water damage and ice buildup

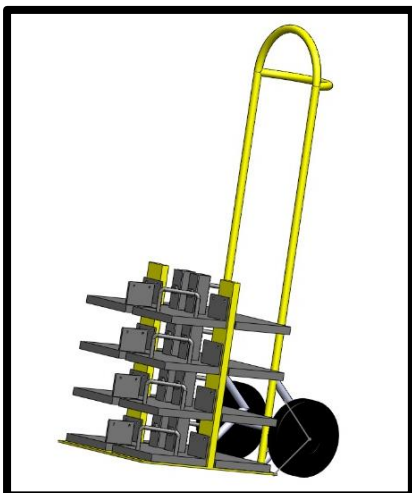

- Portable Guard railing base cart accommodates up to four (4) bases
- Large wheels allow for easy movement over a variety of roof surfaces
- Available in yellow colour
- Aids in installation of Guard railing